

ACE-TS

One brewer...

Newco introduces a Telescoping Brewer that adjusts to fit your Dispenser.

...One solution



Adjust it up for tall dispensers
 Maximum Height of brewer: 26 1/2"
 Maximum Height of dispenser: 22 1/2"



Newco's
 Telescoping
 Brewer is
 adjustable in
 12 one inch
 increments.

Adjust it down for short dispensers

Min. Height of brewer: 18 3/4"
 Min. height of dispenser: 10 1/2"


Dispenser Options



* Contact Customer Service for additional color, sizes and private labeling.

ACE-TS Telescoping Brewer

- Ready light indicates optimum brew temperature
- Flashing brew light alerts user that coffee is brewing
- Universal base for perfect dispenser alignment
- Gravity fed hot water faucet for tea, soups and hot coco
- Tank "ON/OFF" switch for easy installation
- Pulse brewing option - when turned "on" allows pulsation of water over coffee grounds of coffee
- Auto arm capable. When activated locks out brew cycle until optimum temperature is achieved
- PDS Valve. The most accurate flow control on the market, eliminating service calls due to inconsistent pot levels
- Four configurations in one brewer: TD Model, AP Model, LD Model, & TC Model.

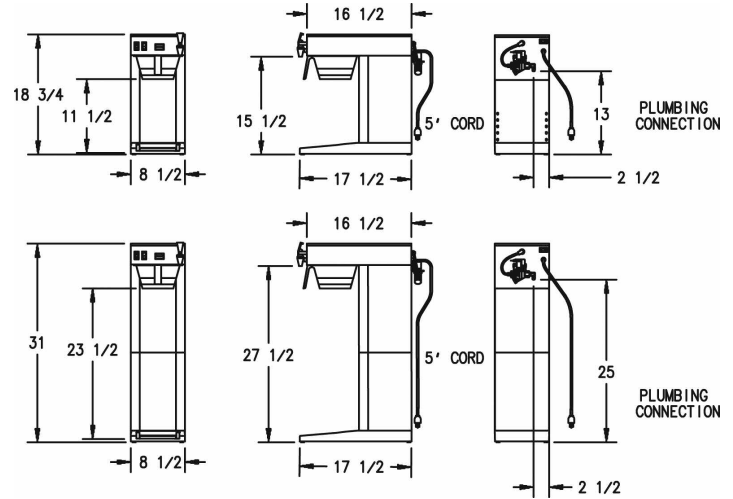

LD CONFIGURATION:

- Brews Into The 2.54 Newco Server Without Base.
- Brews Into The 1.9L Up To 5.0L Shurizjo Thermal Servers Without Base.
- Brews Into The 2.0L Shurizjo Airpot.

TC CONFIGURATION:

- Brews Only Into The 1.9L Vaculator S/S Thermal Server - Tall.

TD CONFIGURATION:

- Brews Into The 2.5L Newco Server With Regular Base.
- Brews Into The 1.9L & 2.5L Shurizjo Thermal Servers With Regular Base.
- Brews Into The 3.8L & 5.0L Shurizjo Thermal Servers Without Base.

AP CONFIGURATION:

- Brews Into The 2.0L Up To 2.5L E-Air Airpots.
- Brews Into The 1.9L Up To 3.0L Peacock Airpots.
- Brews Into The 2.0L Up To 3.5L Shurizjo Airpots.
- Brews Into The 2.2L Vaculator Airpots.



	Base Model	Control Option	Part Number	Volts	Amps	Tank* Wattage	Cubic Feet	Ship Weight	Cord Attached
USA	Ace-TS w/PDS	Telescoping	120780-USA	120	15	1750	9.8	34	Yes
Canada	Ace-TS w/PDS	Telescoping	120780-CAN	120	15	1400	9.8	34	Yes

*Cord not included on 240v models. Available for purchase. Contact Customer Service.

Electrical: 120V models are 2 wires plus ground service rated 120V, single phase, 60Hz. 120/240 V models are 3 wires plus ground service rated 120/240 V, single phase, 60Hz

Plumbing: Water line should be 20-90 PSI and have a minimum flow rate of 1.5 GPM. Mechanical connection on brewer is 1/4" male flare connector.